



TELESCOPIC SLIDES

Type: 3213

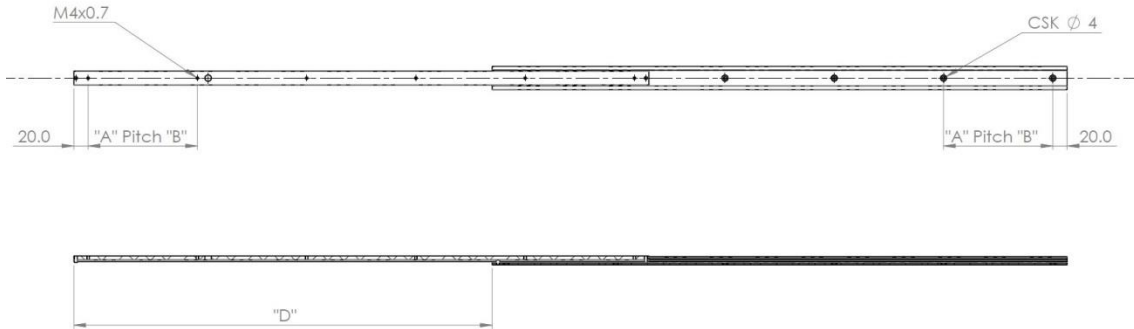

Configuration Table					
Part Number	Installation Length "L"	Extension Length "D"	Load Per Pair (kg)	Drill Table	
				"A"	"B"
4013.3213.0300	300	162	50	130	3
4013.3213.0350	350	212	53	155	3
4013.3213.0400	400	262	56	120	4
4013.3213.0450	450	312	55	136.5	4
4013.3213.0500	500	282	55	115	5
4013.3213.0550	550	332	45	127.5	5
4013.3213.0600	600	382	40	140	5
4013.3213.0650	650	432	35	122	6
4013.3213.0700	700	482	30	132	6
4013.3213.0750	750	532	25	142	6
4013.3213.0800	800	582	20	152	6

Mounting details

Refer to drill table hole pitches



We recommend use the major axis, do not dismantle the slide! The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam.

- Anodised aluminium 6005A milled ball race for accuracy
- Caged cross roller bearings for smooth, deflection free extension
- Unique design eliminates brinelling/bearing indentation on the raceways
- Standard lengths and extensions 300-1000mm
- Special lengths, drillings and surface finish upon request
- Silent, lightweight and corrosion resistant