



NETTUNO PU

Colour: clear with ivory spiral

Temperature range: -10°C + 60°C 14°F + 140°F


Features: PVC hose reinforced by antishock rigid PVC spiral. Inner PU layer abrasion resistant and food grade according to the European Regulation 2002/72/CE, classes A, B, C, D (excepted milky products). Inside smooth, light, very flexible and strong, resists to fatigue, weather and most chemicals.

Applications: suction and delivery of alimentary products and liquids. Thanks to its PU layer is particularly suitable for transport of grains, animal feed, sugar and flour, whenever stronger abrasion resistance is needed.


The antistatic version is available on request.

Technical Data

Part number	Inside Ø	Min. wall thickness	Max. wall thickness	Weight	Working pressure	Bursting pressure	Vacuum	Bending radius	Roll lenght	Volume
	mm	mm	mm	g/m	bar	bar	mH2O	mm	m	m ³
NP 01 030.0 000	30	2,8	3,3	360	5	15	7	150	30	0,089
NP 01 032.0 000	31,8	2,9	3,4	390	5	15	7	155	30	0,099
NP 01 035.0 000	35	3,0	3,5	440	5	15	7	170	30	0,108
NP 01 038.0 000	38,1	3,1	3,7	520	5	15	7	185	30	0,116
NP 01 040.0 000	40	3,1	3,8	550	5	15	7	195	30	0,134
NP 01 045.0 000	45	3,1	4,1	670	5	15	7	215	30	0,158
NP 01 050.0 000	50	3,3	4,5	800	5	15	7	235	30	0,199
NP 01 052.0 000	50,8	3,3	4,5	810	5	15	7	235	30	0,201
NP 01 060.0 000	60	3,4	4,6	970	5	15	7	275	30	0,251
NP 01 063.0 000	63,5	3,5	4,6	1040	5	15	7	290	30	0,293
NP 01 070.0 000	70	3,7	4,9	1200	5	15	7	320	30	0,430
NP 01 076.0 000	76,2	3,9	5,2	1380	5	15	7	340	30	0,480
NP 01 080.0 000	80	4,1	5,5	1550	4	12	7	365	30	0,520
NP 01 090.0 000	90	4,4	5,8	1850	4	12	7	420	30	0,598
NP 01 100.0 000	100	4,7	6,3	2200	4	12	7	470	30	0,720
NP 01 102.0 000	102	4,7	6,3	2250	4	12	7	470	30	0,733

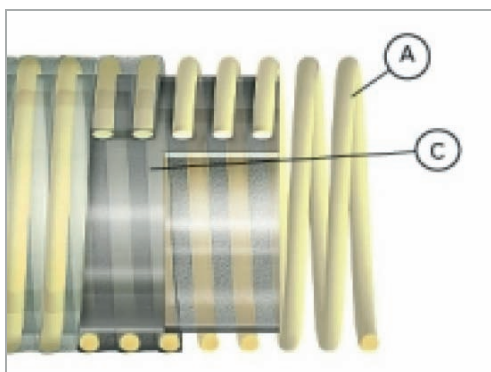

Antishock rigid PVC spiral

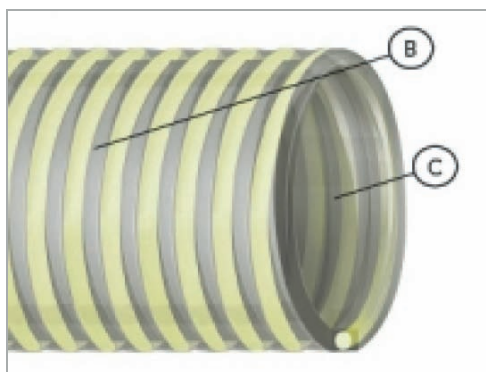

PVC wall (B) with inner ply food grade PU resistant to abrasion (C)