




# FLEXADUX® P 4 NEO II

**Light weight, double-ply  
Neoprene ducting**

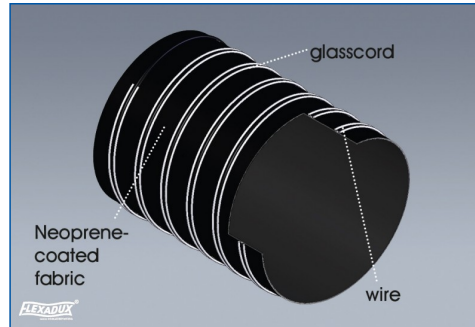

**Material:**

Neoprene- coated glass fabric, 2-ply, black

**Single Length:**

4 m, special lengths available on request

**Temperature Resistance:**

- 35°C up to + 135°C (interm. up to + 150°C)

**Applications:**

Suction and transport of air and gases, in plastic industry, paper processing industry, vehicle and engine construction

**Properties:**

Very good flexibility, good chemical resistance, smooth bore, UV- resistant

**Special Construction:**

- With spiral free cuffs / with polyester- fabric

## TECHNICAL DATA

ID (mm)	OD (mm)	Weight (kg/m)	Bend. Radius (mm)	max. Work.press. (bar)	max. Vacuum (bar)
13	15,6	0,09	13	2,60	0,70
19	21,6	0,10	19	2,50	0,70
25	28,2	0,15	25	2,50	0,70
32	35,2	0,18	32	2,50	0,58
38	41,2	0,21	38	2,40	0,58
41	44,2	0,24	41	2,40	0,58
51	54,7	0,29	51	2,40	0,53
55	58,7	0,30	55	2,30	0,53
60	63,7	0,34	60	2,20	0,53
63	66,7	0,36	63	2,20	0,46
65	68,7	0,38	65	2,20	0,46
70	73,7	0,44	70	2,20	0,46
76	79,7	0,47	76	2,10	0,44
80	83,7	0,49	80	2,10	0,40
83	86,7	0,51	83	2,10	0,40
90	93,7	0,55	90	2,00	0,40
102	106,2	0,61	102	1,80	0,35
110	113,2	0,76	110	1,70	0,30
120	124,2	0,81	120	1,50	0,21
127	131,7	0,86	127	1,50	0,21
140	144,7	0,95	140	1,40	0,18
152	157,2	1,10	152	1,10	0,17
160	165,2	1,15	160	0,90	0,15
178	183,2	1,28	178	0,80	0,14
180	185,2	1,30	180	0,80	0,14
203	208,2	1,39	203	0,60	0,10
229	234,2	1,60	229	0,50	0,08
254	259,2	1,78	254	0,40	0,07
305	310,2	2,17	305	0,20	0,05

Further diameters available upon request!

Technical data are based on + 23° C.



**SCHAUENBURG RUHRKUNSTSTOFF GMBH**

Weseler Str. 35 · 45478 Mülheim-Ruhr · Germany · Tel. +49 (0) 2 08 99 91- 0 · Fax +49 (0) 2 08 5 33 74 · mail@schauenburg-rk.com